


STICK-ON MOUNTING FINGERSTRIP 2300


Stick-on mounting finger stock gaskets with pressure sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications and gaps from 0 to 3 mm

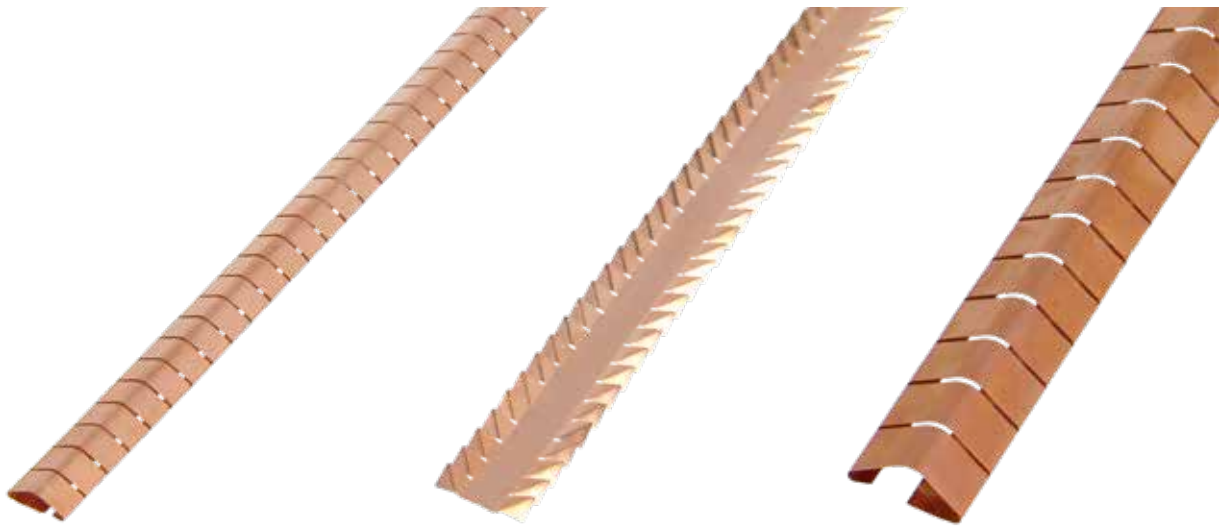

Stick-on mounting finger stock gaskets with pressure-sensitive adhesive (PSA) are suitable for low-profile, bi-directional applications like rack mounting of line-cards in telecommunications equipment.

These gaskets offer high EMI-shielding performance in applications where space may be limited. Stick-on mounting fingerstrips are low-compression, adhesive-mounted beryllium-copper shielding strips. The self-adhesive tape makes mounting easy and secure.


STICK-ON 2301

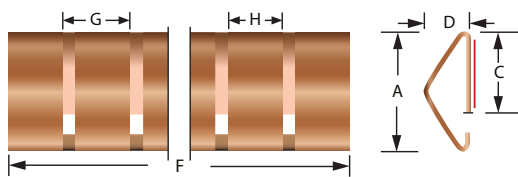

Part nr.	A	C	D	F	G	H	Material thickness
2301-01	7.1	4.6	2.8	610	4.8	4.3	0.05mm
2301-03	8.1	5.3	2.8	406	4.8	4.3	0.05mm
2301-05	8.8	5.3	2.8	408	4.8	4.3	0.05mm
2301-06	9.4	5.3	3.3	409	6.3	5.7	0.05mm
2301-07	15.2	7.1	5.6	610	9.5	8.7	0.09mm
2301-08	19.8	11.2	8.1	457	8.8	8.7	0.10mm
2301-09	27.9	19.8	10.4	457	12.7	11.7	0.10mm
2301-10	5.3	3.3	2.0	406	4.8	4.3	0.05mm
2301-11	15.2	7.2	5.7	455	9.5	8.7	0.10mm

Material: Beryllium-copper

STICK-ON 2302

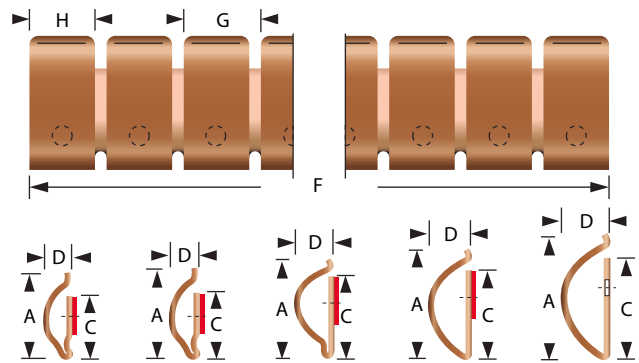


Part nr.	A	C	D	F	G	H	Material thickness
2302-01	6.7	5.5	3.5	406	4.8	4.3	0.07mm
2302-03	9.0	7.5	4.4	406	6.4	5.8	0.08mm
2302-04	14.5	12.6	5.6	610	9.5	8.7	0.09mm
2302-04-R	14.5	12.6	5.6	7620 (on rol)	9.5	8.7	0.09mm
2302-05	19.3	12	6.4	610	9.5	8.5	0.10mm
2302-06	29.7	17.8	12.3	304	12.7	11.7	0.18mm

Material: Beryllium copper

» STICK-ON MOUNTING FINGERSTRIP 2300


STICK-ON 2304

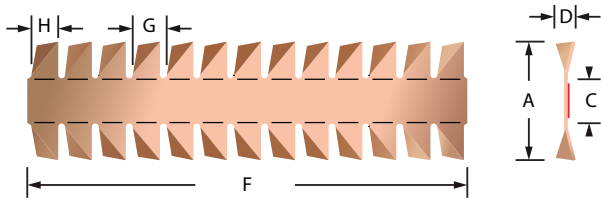

Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2304-01	12.7	4.8	1.6	610	4.2	3.7	0.08mm	25%: 280 N/m 50%: 570 N/m
2304-03	12.7	4.8	1.6	7600 (on roll)	4.2	3.7	0.08mm	25%: 280 N/m 50%: 570 N/m

Material: Beryllium copper

STICK-ON 2305

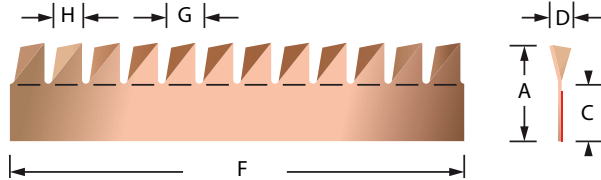

Part nr.	A	C	D	F	G	H	Material thickness	Compression force N
2305-01	5.8	3.6	0.8	610	2.4	2.0	0.08mm	
2305-02	8.6	4.6	1.8	610	4.2	3.8	0.08mm	25%: 130 N/m 50%: 330 N/m
2305-03	12.7	6.4	3.0	610	6.4	6.0	0.08mm	25%: 70 N/m 50%: 150 N/m
2305-04	8.6	4.6	1.8	7600 (on roll)	4.2	3.8	0.08mm	25%: 130 N/m 50%: 330 N/m

Material: Beryllium copper

ORDER EXAMPLE

Part number	Adhesive
<input type="text"/>	<input type="text"/>
Specify the part number that you need from the table	1 : Standard adhesive 2 : Conductive self-adhesive 3 : No adhesive

*Notice

Information supplied in these data sheets is based on independent and laboratory tests which Holland Shielding Systems BV, hereafter referred to as HSS believes to be reliable. HSS has no control over the design of customer's product which incorporates products, therefore it is the responsibility of the user to determine the suitability for his particular application and we recommend that the user make his own test to determine suitability.

The product described in this data sheet shall be of standard quality, however the products are sold without warranty of fitness for a particular purpose, either expressed or implied, except to the extent expressly stated on HSS invoice, quotation or order acknowledgment. HSS does not warrant that products described in this data sheet will be free of conflict with existing or future patents of third parties. All risks of lack of fitness, patent infringement and the like are assumed by the user.